

R series 端子形状 BL/SSはラグ端子板

单相 複巻



R1 100-110V-5~24V

品番	仕様			端子形状	外形寸法 (mm)				取付寸法 (mm)			取付穴 (mm)		端子	絶縁種類	重量	本体価格	
	1次電圧	2次電圧	容量		W	D	H	I	A	B	C	E	F					
◎ R1-631	100V-0 110V 100V 0	6.3V	1A	BL	51	40	41	70	60			4×6		ラグ	A	約260g		
R1-632		5V		2A	BL	60	45	51	84	71			4×7		ラグ	A	約440g	
R1-633		0		3A	BL	69	50	59	91	80			4.5×6		ラグ	A	約740g	
◎ R1-1203	100V 0	12V-10V-0	0.3A	BL	43	36	36	60	51			3.8×4		ラグ	A	約150g		
R1-1205		12V		0.5A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	
◎ R1-121	110V 100V 0	10V	1A	BL	60	45	51	80	70			4×6		ラグ	A	約450g		
R1-122		8V		2A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	
R1-123		6V		3A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	
R1-125		0		5A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	
◎ R1-2003	110V 100V 0	20V	0.3A	BL	51	40	41	70	60			4×6		ラグ	A	約260g		
R1-2005		18V		0.5A	BL	60	45	51	80	70			4×6		ラグ	A	約440g	
R1-201		16V		1A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	
R1-202		14V		2A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	
R1-203		0		3A	BL	79	80	67	104	92			4.5×7		ラグ	A	約1.6kg	
R1-205		0		5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R1-2405	110V 100V 0	24V	0.5A	BL	60	53	51	84	70			4×6		ラグ	A	約500g		
R1-241		20V		1A	BL	69	59	59	91	80			4.5×6		ラグ	A	約900g	
R1-242		15V		2A	BL	79	70	67	104	92			4.5×6		ラグ	A	約1.4kg	
R1-243		12V		3A	BL	89	77	76	115	102			4.5×6		ラグ	A	約2.0kg	
R1-245		0		5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	


R1 100-110V-15~50V

◎ R1-3005	110V 100V 0	30V	0.5A	BL	60	53	51	84	72			4×7		ラグ	A	約500g		
R1-301		25V		1A	BL	69	65	60	94	80			4.5×6		ラグ	A	約1.0kg	
R1-302		20V		2A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	
R1-303		15V		3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R1-3805	110V 100V 0	38V	0.5A	BL	69	55	60	90	80			4.5×6		ラグ	A	約900g		
R1-381		35V		1A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	
R1-382		32V		2A	BL	89	77	76	115	102			4×8		ラグ	A	約2.0kg	
R1-383		24V		3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R1-501	110V 100V 0	50V	1A	BL	79	70	67	104	92			4.5×6		ラグ	A	約1.4kg		
R1-502		45V		2A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R1-503		40V		3A	SS	96	95	82		59	67	40	5.5×10	4	ラグ	A	約2.9kg	


常時在庫(◎) 非在庫(記号なし)

形状・寸法図


BL形 (ラグ端子板)

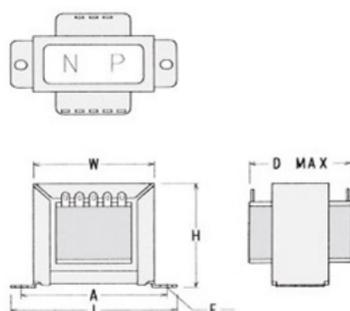

SS形 (ラグ端子板)



結線図



R series

端子形状 BL/SSはラグ端子板 UPはIP2X対応ねじアップ式フィンガープロテクト端子台

単相 複巻



R2 200·220V-6~24V

品番	仕様			端子形状	外形寸法 (mm)				取付寸法 (mm)			取付穴 (mm)		端子	絶縁種類	重量	本体価格
	1次電圧	2次電圧	容量		W	D	H	I	A	B	C	E	F				
R2-6305	220V-0	6.3V 0	0.5A	BL	43	36	35	60	52			3.8×4		ラグ	A	約160g	
R2-631	220V		1A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	
R2-632	200V		2A	BL	60	45	51	80	70			4×7		ラグ	A	約440g	
R2-633	0		3A	BL	69	50	59	91	80			4.5×6		ラグ	A	約740g	
◎ R2-1203	220V 200V 0	12V-10V-0	0.3A	BL	43	36	35	60	52			3.8×4		ラグ	A	約160g	
R2-1205		12V	0.5A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	
R2-121		10V	1A	BL	60	45	51	84	71			4×6		ラグ	A	約440g	
R2-122		8V	2A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	
R2-123		6V	3A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	
R2-125		0	5A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	
R2-2005	220V 200V 0	20V 18V 16V 14V 0	0.5A	BL	60	45	51	80	70			4×6		ラグ	A	約440g	
R2-201			1A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	
R2-202			2A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	
R2-203			3A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	
R2-205		20V-18V-16V-14V-12V-0	5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R2-2403	220V 200V 0	24V 20V 15V 12V 0	0.3A	BL	50	42	43	71	60			4×6		ラグ	A	約300g	
R2-2405			0.5A	BL	60	53	51	84	70			4×6		ラグ	A	約500g	
R2-241			1A	BL	69	59	59	91	80			4.5×6		ラグ	A	約900g	
R2-242			2A	BL	79	72	67	104	92			4.5×6		ラグ	A	約1.4kg	
R2-243			3A	BL	89	77	76	115	102			4.5×6		ラグ	A	約2.0kg	
R2-245			5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	


R2 200·220V-15~50V

R2-301	220V 200V 0	30V 25V 20V 15V 0	1A	BL	69	65	60	94	80			4.5×6		ラグ	A	約1.0kg	
R2-302			2A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	
R2-303			3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R2-305			5A	SS	96	92	82		59	67	40	5.5×10	4	ラグ	A	約2.9kg	
R2-381	220V 200V 0	38V 35V 32V 24V 0	1A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	
R2-382			2A	BL	89	77	76	115	102			4×8		ラグ	A	約2kg	
R2-383			3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R2-385			5A	SS	108	102	99		75	73	48	6×10	4	ラグ	A	約3.9kg	
R2-5005	220V 200V 0	50V 45V 40V 35V 0	0.5A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	
R2-501			1A	BL	79	70	67	104	92			4.5×6		ラグ	A	約1.4kg	
R2-502			2A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	
R2-503			3A	SS	96	95	82		59	67	40	5.5×10	4	ラグ	A	約2.8kg	
R2-505			5A	UP	128	105	131		97	60	68	6.5×12	5	M4	A	約4.8kg	


常時在庫(◎) 非在庫(記号なし)

形状・寸法図


BL形 (ラグ端子板)

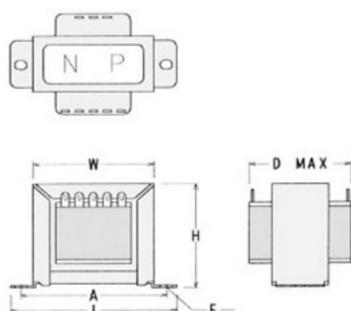

SS形 (ラグ端子板)



UP形 (ねじアップ式端子台)



結線図

