

**Rseries** 端子形状 BL/SSはラグ端子板

单相 複巻



**R1 100-110V-5~24V**

品番	仕様			端子形状	外形寸法 (mm)				取付寸法 (mm)			取付穴 (mm)		端子	絶縁種類	重量	本体価格
	1次電圧	2次電圧	容量		W	D	H	I	A	B	C	E	F				
◎ R1-631	100V-0	6.3V	1A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	1,500
◎ R1-632	110V   100V	5V	2A	BL	60	45	51	84	71			4×7		ラグ	A	約440g	2,000
◎ R1-633	100V   0	0	3A	BL	69	50	59	91	80			4.5×6		ラグ	A	約740g	2,800
◎ R1-1203	100V   0	12V-10V-0	0.3A	BL	43	36	36	60	51			3.8×4		ラグ	A	約150g	1,400
◎ R1-1205	110V   100V	12V	0.5A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	1,800
◎ R1-121	110V   100V	10V	1A	BL	60	45	51	80	70			4×6		ラグ	A	約450g	2,000
◎ R1-122	100V   0	8V	2A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	2,500
◎ R1-123	100V   0	6V	3A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	4,000
○ R1-125	100V   0	0	5A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	5,200
◎ R1-2003	110V   100V	20V	0.3A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	1,500
◎ R1-2005	110V   100V	18V	0.5A	BL	60	45	51	80	70			4×6		ラグ	A	約440g	1,900
◎ R1-201	100V   0	16V	1A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	2,800
◎ R1-202	100V   0	14V	2A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	4,000
◎ R1-203	100V   0	0	3A	BL	79	80	67	104	92			4.5×7		ラグ	A	約1.6kg	4,800
○ R1-205	100V   0	0	5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	7,900
◎ R1-2405	110V   100V	24V	0.5A	BL	60	53	51	84	70			4×6		ラグ	A	約500g	2,600
◎ R1-241	100V   0	20V	1A	BL	69	59	59	91	80			4.5×6		ラグ	A	約900g	2,900
◎ R1-242	100V   0	15V	2A	BL	79	70	67	104	92			4.5×6		ラグ	A	約1.4kg	4,400
◎ R1-243	100V   0	12V	3A	BL	89	77	76	115	102			4×8		ラグ	A	約2.0kg	5,500
○ R1-245	100V   0	0	5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	8,100


**R1 100-110V-15~50V**

◎ R1-3005	110V   100V	30V	0.5A	BL	60	53	51	84	72			4×7		ラグ	A	約500g	2,200
◎ R1-301	100V   0	25V	1A	BL	69	65	60	94	80			4.5×6		ラグ	A	約1.0kg	3,400
◎ R1-302	100V   0	20V	2A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	4,700
○ R1-303	100V   0	15V	3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	7,500
◎ R1-3805	110V   100V	38V	0.5A	BL	69	55	60	90	80			4.5×6		ラグ	A	約900g	2,900
◎ R1-381	100V   0	35V	1A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	4,000
◎ R1-382	100V   0	32V	2A	BL	89	77	76	115	102			4×8		ラグ	A	約2.0kg	5,800
○ R1-383	100V   0	24V	3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	8,300
◎ R1-501	110V   100V	50V	1A	BL	79	70	67	104	92			4.5×6		ラグ	A	約1.4kg	4,600
○ R1-502	100V   0	45V	2A	SS	96	85	82		59	60	48	5.5×10	4	ラグ	A	約2.5kg	7,600
○ R1-503	100V   0	40V	3A	SS	96	95	82		59	67	48	5.5×10	4	ラグ	A	約2.9kg	8,500


◎ 在庫品 ○ 非在庫品 無印 受注生産品

形状・寸法図


BL形 (ラグ端子板)

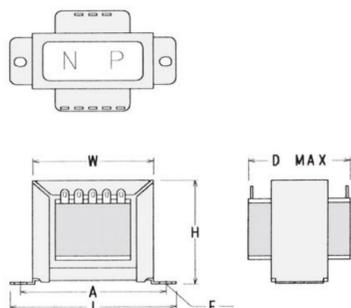

SS形 (ラグ端子板)



結線図



Rseries

端子形状 BL/SSはラグ端子板 UPはIP2X対応ねじアップ式フィンガープロテクト端子台

単相 複巻




R2 200-220V-6~24V																	
品番	仕様			端子形状	外形寸法 (mm)				取付寸法 (mm)			取付穴 (mm)		端子	絶縁種類	重量	本体価格
	1次電圧	2次電圧	容量		W	D	H	I	A	B	C	E	F				
◎ R2-6305	220V-0	6.3V   0	0.5A	BL	43	36	35	60	50			3.8×4		ラグ	A	約160g	1,300
◎ R2-631	220V		1A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	1,500
◎ R2-632	200V		2A	BL	60	45	51	80	70			4×7		ラグ	A	約440g	2,000
◎ R2-633	0		3A	BL	69	50	59	91	80			4.5×6		ラグ	A	約740g	2,800
◎ R2-1203	220V   200V   0	12V-10V-0	0.3A	BL	43	36	35	60	50			3.8×4		ラグ	A	約160g	1,400
◎ R2-1205		12V	0.5A	BL	51	40	41	70	60			4×6		ラグ	A	約260g	1,900
◎ R2-121		10V	1A	BL	60	45	51	84	71			4×6		ラグ	A	約440g	2,100
◎ R2-122		8V	2A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	2,600
◎ R2-123		6V	3A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	4,000
◎ R2-125		0	5A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	5,200
◎ R2-2005	220V   200V   0	20V	0.5A	BL	60	45	51	80	70			4×6		ラグ	A	約440g	2,000
◎ R2-201		18V	1A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	2,800
◎ R2-202		16V	2A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	4,100
◎ R2-203		14V	3A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	5,000
◎ R2-205		0	20V-18V-16V-14V-12V-0	5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg
◎ R2-2403	220V   200V   0	24V	0.3A	BL	50	42	43	71	60			4×6		ラグ	A	約300g	1,800
◎ R2-2405		20V	0.5A	BL	60	53	51	84	70			4×6		ラグ	A	約500g	2,800
◎ R2-241		15V	1A	BL	69	59	59	91	80			4.5×6		ラグ	A	約900g	3,100
◎ R2-242		12V	2A	BL	79	72	67	104	92			4.5×6		ラグ	A	約1.4kg	5,200
◎ R2-243		0	3A	BL	89	77	76	115	102			4×8		ラグ	A	約2.0kg	6,700
◎ R2-245		0	5A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	8,500
R2 200-220V-15~50V																	
◎ R2-301	220V   200V   0	30V	1A	BL	69	65	60	94	80			4.5×6		ラグ	A	約1.0kg	3,500
◎ R2-302		25V	2A	BL	79	75	67	104	92			4.5×7		ラグ	A	約1.6kg	4,800
◎ R2-303		20V	3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	7,600
◎ R2-305		0	5A	SS	108	92	92		75	58	48	6×10	4	ラグ	A	約3.3kg	8,700
◎ R2-381	220V   200V   0	38V	1A	BL	79	65	67	104	92			4.5×8		ラグ	A	約1.2kg	4,100
◎ R2-382		35V	2A	BL	89	77	76	115	102			4×8		ラグ	A	約2kg	5,900
◎ R2-383		32V	3A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	8,500
◎ R2-385		0	5A	SS	108	102	99		75	68	48	6×10	4	ラグ	A	約3.9kg	10,900
◎ R2-5005	220V   200V   0	50V	0.5A	BL	69	55	59	91	80			4.5×6		ラグ	A	約770g	2,900
◎ R2-501		45V	1A	BL	79	70	67	104	92			4.5×6		ラグ	A	約1.4kg	4,700
◎ R2-502		40V	2A	SS	96	85	82		59	60	40	5.5×10	4	ラグ	A	約2.5kg	7,700
◎ R2-503		35V	3A	SS	96	95	82		59	67	40	5.5×10	4	ラグ	A	約2.8kg	9,100
◎ R2-505		0	5A	UP	128	105	131		97	60	68	6.5×12	5	M4	A	約4.8kg	12,800


◎ 在庫品 ○ 非在庫品 無印 受注生産品

形状・寸法図

BL形 (ラグ端子板)

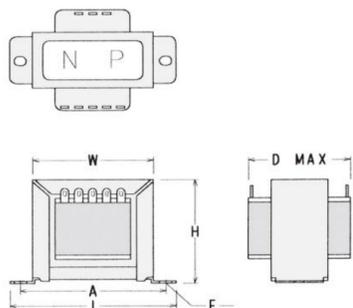

SS形 (ラグ端子板)



UP形 (ねじアップ式端子台)

